



AXIstorage Li SH



High-performance lithium-ions-energy storage for residential, e-mobility and commercial applications

Advantages:



7,5 - 15 kWh useable capacity depending on the ordered degree of expansion with Energypacks each 2,5 kWh



Flexible configuration:
up to max. 15 kWh useable capacity On-Grid



Permanent charging performance of up to 30 A
Permanent discharge performance of up to 30 A



Up to 20 years of life time due to an optimized cooling system



10 years of time value replacement warranty



Handy sized Energypack with only 22 kg weight



7,5-15
kWh
flexible

AXIstorage Li SH

Electrical Data



	3 Energypack	4 Energypack	5 Energypack	6 Energypack
Nominal Capacity	9,0 kWh	12,0 kWh	15,0 kWh	18,0 kWh
Useable Capacity	7,5 kWh	10,0 kWh	12,5 kWh	15,0 kWh
Nominal Voltage	155,0 V	207,0 V	258,0 V	310,0 V
Nominal Capacity	57 Ah	57 Ah	57 Ah	57 Ah
Charging Power	30 A	30 A	30 A	30 A
Discharging Power	30 A	30 A	30 A	30 A
Efficiency	> 97 %	> 97 %	> 97 %	> 97 %
Cooling	passive	passive	passive	passive
Range of Temperature	0 - 50 °C			
Max. Air Humidity (not condensing)	85 %	85 %	85 %	85 %

Safety

- Double wall housing
- Elevated construction to protect against water damage
- Monitoring of current, voltage and temperature
- Single cell monitoring
- State of charge determination and battery monitoring (SOC + SOH)
- Passive balancing

Included in Delivery

- Case with BMS, connection cable and all communication cables up to and including degree of expansion with 6 Energypacks
- Energypack each 2,5 kWh (3 - 6 units)


Compatibility

- SMA Sunny Boy Storage: 2.5 / 3.7 / 5.0 / 6.0
- Kostal Plenticore Plus

Mechanical Data

	3 Energypack	4 Energypack	5 Energypack	6 Energypack
Technology	Lithium (NMC)			
W x H x D	751 x 870 x 423 mm			
Weight	107 kg	129 kg	151 kg	173 kg
Protection Category	IP21	IP21	IP21	IP21
Certifications and Standards:	CE / UN 38.3 / IEC 62619			

For example: Connection with SMA Sunny Boy Storage

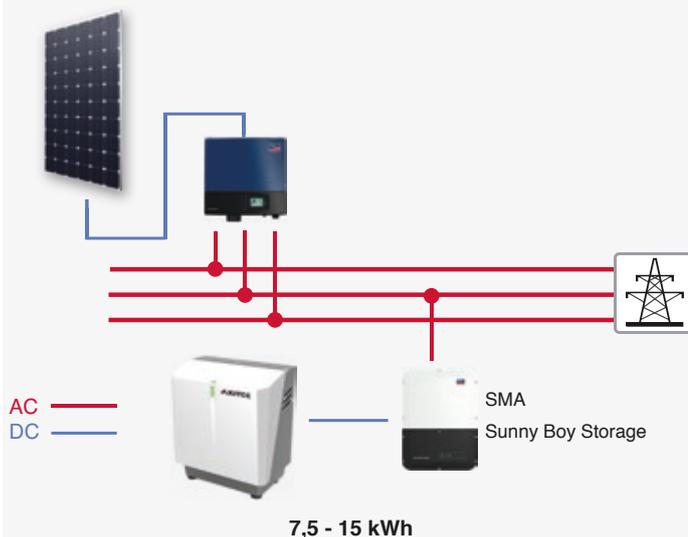

For example: Connection with Kostal Plenticore Plus

